


美国军用电线 MIL-W-16878/12 (TYPE KK)

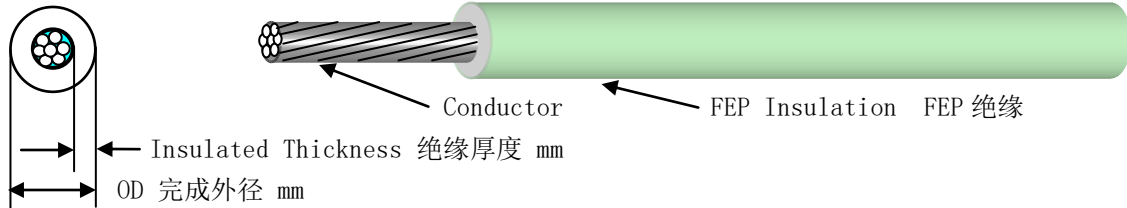

引用标准:

MIL-DTL-16878/12

使用材质:

FEP 材质绝缘, 额定温度: 200°C; 额定电压: 1000V。

应用范围:

应用于国防部相关的各个部门。

标准规格参数:

PIN	Wire size (AWG)	Stranding	Conductor		Conductor Diameter (mm)	Insulated Thickness Nominal (mm)	Finished Wire Diameter (mm)	
			Material	Coating			Min	Max
M16878/12	30	SOLID	Copper	Silver	0.254	0.38	0.91	1.12
M16878/12	30	7/38	Copper	Silver	0.310	0.38	0.97	1.17
M16878/12	28	SOLID	Copper	Silver	0.320	0.38	0.99	1.19
M16878/12	28	7/36	Copper	Silver	0.380	0.38	1.04	1.24
M16878/12	26	SOLID	Copper	Silver	0.400	0.38	1.06	1.26
M16878/12	26	7/34	Copper	Silver	0.480	0.38	1.14	1.35
M16878/12	26	19/38	Copper	Silver	0.480	0.38	1.14	1.35
M16878/12	24	SOLID	Copper	Silver	0.510	0.38	1.17	1.37
M16878/12	24	7/32	Copper	Silver	0.610	0.38	1.27	1.47
M16878/12	24	19/36	Copper	Silver	0.610	0.38	1.27	1.47
M16878/12	22	SOLID	Copper	Silver	0.640	0.38	1.30	1.52
M16878/12	22	7/30	Copper	Silver	0.760	0.38	1.42	1.63
M16878/12	22	19/34	Copper	Silver	0.760	0.38	1.42	1.63
M16878/12	20	SOLID	Copper	Silver	0.810	0.38	1.47	1.68
M16878/12	20	7/28	Copper	Silver	0.970	0.38	1.63	1.83
M16878/12	20	19/32	Copper	Silver	0.970	0.38	1.63	1.83
M16878/12	18	7/26	Copper	Silver	1.220	0.38	1.88	2.13
M16878/12	18	19/30	Copper	Silver	1.220	0.38	1.88	2.13
M16878/12	16	19/29	Copper	Silver	1.350	0.46	2.11	2.41
M16878/12	14	19/27	Copper	Silver	1.700	0.46	2.49	2.90
M16878/12	12	19/25	Copper	Silver	2.130	0.52	2.97	3.38
M16878/12	10	37/26	Copper	Silver	2.740	0.52	3.48	3.89
M16878/12	8	133/29	Copper	Silver	4.110	0.60	5.05	5.56