

**CHARACTER:**

**1.Physical performance**

- a、 Good mechanical properties
- b、 Good resistance to high temperature, low temperature resistance
- c、 Good flame retardancy
- d、 Good corrosion resistance
- e、 Good resistance to climate
- f、 Good lubricity (small friction coefficient)

**2.Electrical Properties**

- a、 Electrical insulation good
- b、 Has the very high resistivity
- c、 Low dielectric constant 2.1

**3.Processing properties**

- a、 Use half extrusion processing
- b、 Good wire processing performance
- c、 In the process of wire processing good compatibility
- d、 According to UL standard design

**4.Environmental protection**

- a、 ROHS/REACH compliant
- b、 nonhazardous


**SHOULD BE USED:**

Internal Wiring of Appliances.

**REFERENCE:**

UL758-2010、UL1581-2009

**Outline:**

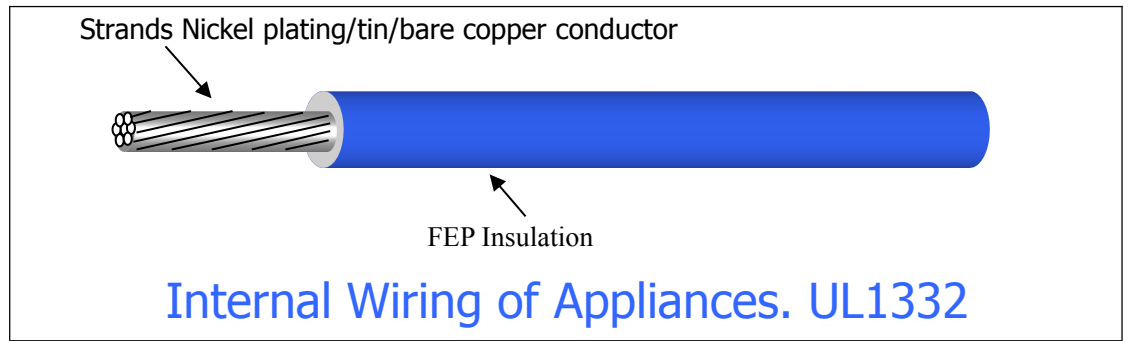

**Wire structure description:**  
 Conductor: Nickel plating/tin/bare copper conductor;  
 Insulation materials: FEP Insulation

Conductor temperature not over 200°C FEP insulated wire  
 Rated temperature: 200°C rated voltage: 300V

STYLE	standard AWG	Conductor size (No./ mm) ±0.005mm	Conductor resistance 20°C (Ω/Km)	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)	
					Nom.	Min.	Mon.	Tol.
1332	10	37/0.42	3.54	2.94	0.35	0.30	3.64	±0.15
	12	37/0.374	5.64	2.62	0.35	0.30	3.32	±0.15
	14	19/0.361	8.96	1.81	0.35	0.30	2.50	±0.10
	14	1/1.63	8.96	1.63	0.35	0.30	2.33	±0.10
	16	19/0.287	14.60	1.44	0.33	0.30	2.10	±0.10
	18	1/1.02	22.20	1.02	0.33	0.30	1.68	±0.10
	18	19/0.235	23.20	1.18	0.33	0.30	1.84	±0.10
	20	1/0.813	35.20	0.813	0.33	0.30	1.47	±0.10
	20	19/0.19	36.70	0.95	0.33	0.30	1.60	±0.10
	22	7/0.254	59.40	0.77	0.33	0.30	1.43	±0.10
	22	19/0.15	59.40	0.76	0.33	0.30	1.40	±0.10
	22	1/0.65	56.40	0.65	0.33	0.30	1.31	±0.10
	24	7/0.20	94.20	0.61	0.33	0.30	1.26	±0.10
	24	19/0.12	94.20	0.60	0.33	0.30	1.26	±0.10
	26	7/0.16	150.00	0.48	0.33	0.30	1.15	±0.10
	26	1/0.404	143.00	0.404	0.33	0.30	1.06	±0.10
	26	19/0.1	150.00	0.50	0.33	0.30	1.15	±0.10
	28	7/0.127	227.00	0.39	0.33	0.30	1.05	±0.10
	30	7/0.1	361.00	0.30	0.33	0.30	0.96	±0.10
	30	1/0.254	361.00	0.254	0.33	0.30	0.92	±0.10

**Marking:** E211048 AWM STYLE 1332 NO.AWG 200°C 300V VW-1 FEP QIFURUI  
 c AWM 1A 200°C 300V FT1 -LF-

**SAE COLOR SERIES**

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

**PACKAGE**

*PACKAGE			
Part No.	Packing- FT/roll		
10AWG	■ 500Ft	□ 1000Ft	□ 2000Ft
12~20AWG	□ 500Ft	■ 1000Ft	□ 2000Ft
22-30AWG	□ 500Ft	□ 1000Ft	■ 2000Ft

According to customer requirements for packaging packaging

